

# FTB-8525/8535 Packet Blazer

FIBRE CHANNEL AND ETHERNET TEST MODULES



ExactTCP



MEF  
METRO ETHERNET FORUM

EtherSAM

EXFO Connect  
Compatible



Fully integrated test solution for performance assessment of Fibre Channel and Ethernet networks

## KEY FEATURES

1x, 2x, 4x and 10x full-line-rate Fibre Channel traffic generation and BER testing

FC-0, FC-1 and FC-2 logical layer configuration for Fibre Channel port definition, testing and performance analysis

Round-trip latency measurement and buffer-to-buffer credit estimation

Complete EtherSAM (ITU-T Y.1564) test suite, the new standard for turning up and troubleshooting mobile backhaul and business Ethernet services

True wire-speed, stateful TCP throughput based on RFC 6349 test for undisputable SLA enforcement for Ethernet services

Ethernet services performance validation through RFC 2544, BER testing and multistream generation and analysis

10 Mbit/s to 10 Gbit/s Ethernet testing capabilities

EXFO Connect-compatible: automated asset management; data goes through the cloud and into a dynamic database

## PLATFORM COMPATIBILITY



Platform  
FTB-200



Platform  
FTB-500

EXFO

## COMPREHENSIVE TESTING TOOL FOR FIBRE CHANNEL AND ETHERNET SERVICE CHARACTERIZATION

EXFO's FTB-8525/8535 Packet Blazer test modules deliver FC-0, FC-1 and FC-2 logical layer Fibre Channel testing for services delivered via transport protocols such as DWDM, SONET/SDH and dark fiber. They provide valuable timing information as well as buffer credit estimation for Fibre Channel network deployment. These modules support the full range of Fibre Channel interfaces: 1x, 2x, 4x and 10x.

The FTB-8525/8535 modules also offer an optional test suite for complete performance validation of Ethernet services. This allows for fully integrated datacom testing in the industry's smallest form factor including complete Fibre Channel and Ethernet test functionalities.

### TECHNICAL FEATURES

#### Fibre Channel

- Simultaneous traffic generation and analysis at 100% wire speed for 1x, 2x, 4x and 10x Fibre Channel rates
- Fully integrated FC-0, FC-1 and FC-2 logical layer testing, enabling fabric and port login
- Buffer-to-buffer credit estimation for optimal configuration of Fibre Channel nodes
- BER testing of Fibre Channel circuits
- Easy-to-use interface in which to configure settings, customize test routines as well as generate real-time and historical performance reports in order to fully validate today's Ethernet services

#### Ethernet

- Complete EtherSAM (ITU-T Y.1564) test suite to fully validate today's Ethernet services (bidirectional results through dual test set)\*
- Bidirectional RFC 2544 (throughput, latency, frame loss and back-to-back) for Ethernet service performance assessment
- Complete Carrier Ethernet services testing portfolio: PBB-TE (MAC-in-MAC), MPLS and IPv4/IPv6
- Up to 10 Gbit/s full-line-rate data capturing and decoding
- Remote control through Visual Guardian Lite software and VNC
- Packet jitter measurements (IP packet delay variation as per RFC 3393) to qualify Ethernet transport networks for transmission of delay-sensitive traffic such as voice-over-IP (VoIP) and video
- Multistream generation and analysis allowing quality of service (QoS) verification through VLAN and ToS/DSCP prioritization testing


\* Patent pending

## ASSESSING FIBRE CHANNEL SERVICE PERFORMANCE

FTB-8525/8535 Packet Blazer modules provide comprehensive testing capabilities for Fibre Channel network deployments, supporting multiple Fibre Channel interfaces.

### Applications

Since most storage area networks (SANs) cover large distances and Fibre Channel has stringent performance requirements, it is imperative to test at each phase of network deployment to ensure appropriate service levels. EXFO's FTB-8525/8535 modules provide full wire-speed traffic generation at FC-0, FC-1 and FC-2 logical layers, allowing BER testing for link integrity measurements. In addition, latency, buffer-to-buffer credit measurements for optimization as well as login capabilities are supported.

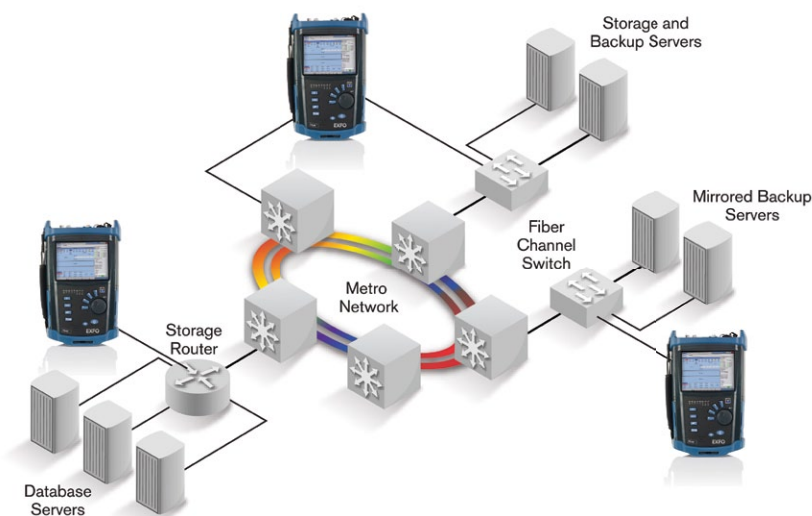


*Thanks to end-to-end network testing capabilities, EXFO's FTB-8525/8535 enable fast deployment and configuration of Fibre Channel networks. Communication between the transport network, interconnection devices and end nodes can be validated with features such as BER testing, latency measurement, buffer-to-buffer credit estimation and port login capabilities.*

### Latency

Transmission of frames in a network is not instantaneous and is subject to multiple delays caused by the propagation delay in the fiber and by processing time inside each piece of network equipment. Latency is the total accumulation of delays between two end points. Some applications such as VoIP, video and storage area networks are very sensitive to excess latency. It is therefore critical for service providers to properly characterize network latency when offering Fibre Channel services. From the latency measurement that they perform, the FTB-8525/8535 modules estimate buffer-to-buffer credit value requirements.

### Buffer-to-Buffer Credit Estimation

Buffer-to-buffer credits are part of the flow control engine for Fibre Channel connections. Usually, network administrators calculate the value by taking the traveled distance and the data rate into consideration; however, since latency issues are not considered, poor accuracy is to be expected. The FTB-8525/8535 modules are capable of estimating buffer credit values with respect to latency by calculating the distance according to the round-trip latency time. This value can then be used by network administrators to optimize the network configuration.

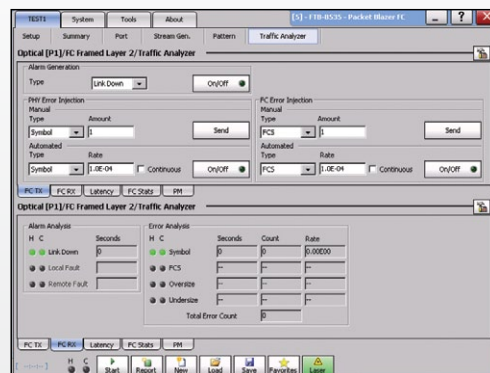


Alarm and error generation and analysis screen

## EFFICIENTLY ASSESSING PERFORMANCE OF FIBRE CHANNEL SERVICES (CONT'D)

### Login Testing

Most next-generation transport devices (xWDM or SONET/SDH mux) supporting Fibre Channel are no longer fully transparent; they also have increased built-in intelligence, acting more as Fibre Channel switches. With switch fabric login ability, the FTB-8525/8535 Packet Blazer modules support connections to a remote location through a fabric or semi-transparent networks.

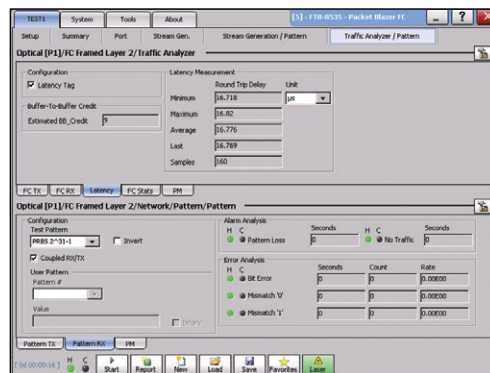

Latency and BERT analysis screen

## ETHERNET PERFORMANCE VALIDATION AND RELIABILITY

EXFO's FTB-8525/8535 Packet Blazers offer a wide range of Ethernet test functions aimed at performance validation and reliability testing, supporting multiple Ethernet interfaces, both optical and electrical.

ELECTRICAL INTERFACE	OPTICAL INTERFACE
10 Mbit/s	100 Mbit/s
100 Mbit/s	1000 Mbit/s (GigE)
1000 Mbit/s	10 Gbit/s 910 GigE LAN/WAN)–FTB-8535 only

### Applications


The FTB-8525/8535 Packet Blazer modules deliver the features required to perform Ethernet service acceptance testing, namely RFC 2544 and BER testing.

## ETHERSAM: THE NEW STANDARD IN ETHERNET TESTING

ITU-T Y.1564 is the new standard for turning up and troubleshooting Carrier Ethernet services. This methodology is completely adapted to today's Ethernet services especially mobile backhaul and commercial services. It is also significantly faster, therefore saving time and resources while optimizing QoS.

The FTB-8525/8535 can perform the EtherSAM (Y.1564) test suite for 10/100/1000M interfaces, at all frame sizes and at full line rate.

EXFO's EtherSAM approach proves even more powerful as it executes the complete ITU-T Y.1564 test suite bidirectionally. Key SLA parameters are measured independently in each test direction, thus providing 100% first-time-right service activation—the highest level of confidence in service testing.

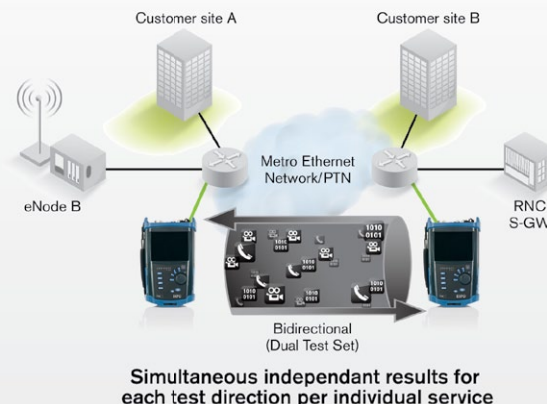

## RFC 2544 Testing

In cases where the Ethernet service is delivered via switched transport, the RFC 2544 measurements provide a baseline by which service providers can define SLAs with their customers. They enable service providers to validate the quality of service (QoS) delivered in order to create value-added services that can be measured and demonstrated to customers. For example, these tests provide performance statistics and commissioning verification for virtual LANs (VLANs), virtual private networks (VPNs) and transparent LAN services (TLS), all of which use Ethernet as an access technology.

The FTB-8525/8535 Packet Blazer modules come with a complete set of RFC 2544 test capabilities, including:

- › Throughput testing
- › Burst (back-to-back) testing
- › Frame loss analysis
- › Latency measurement

## EtherBERT™ Testing

Ethernet is increasingly carried across a variety of layer 1 media over longer distances. This creates a growing need for the certification of Ethernet transport on a bit-per-bit basis, which can be done using bit-error-rate testing (BERT). BERT uses a pseudo-random binary sequence (PRBS) encapsulated into an Ethernet frame, making it possible to go from a frame-based error measurement to a bit-error-rate measurement. This provides the bit-per-bit error count accuracy required for acceptance testing of physical-medium transport systems. In addition to BER testing, the FTB-8525/8535 Packet Blazer modules also provide service disruption time (SDT) measurements.

## Ethernet QoS Measurements

Data services are making a significant shift toward supporting a variety of applications on the same network. Multiservice offerings such as triple-play services have fuelled the need for QoS testing to ensure the condition and reliability of each service and fully qualify SLA parameters. The FTB-8525/8535 Packet Blazer allows service providers to simultaneously simulate and qualify different applications through its multistream application. The user has the capability to configure up to ten streams with different Ethernet and IP QoS parameters such as VLAN ID (802.1Q), VLAN Priority (802.1p), VLAN stacking (802.1ad Q-in-Q), ToS and DSCP. Specific stream profiles to transmit VoIP, video and data can be selected for each stream. Throughput, latency, frame loss and packet jitter (RFC 3393) measurements are also available simultaneously for each stream, allowing fast and in-depth qualification of all SLA criteria.

## MPLS, MPLS-TP and PBB-TE: Carrier Ethernet Transport Solution Testing

As technologically-sophisticated business and residential consumers continue to drive demand for premium, bandwidth-hungry and quality-dependent services, such as voice and video, service providers worldwide are evolving their transport infrastructures to support them. No longer is an all-IP core sufficient.

Ethernet tunneling technologies such as Provider Backbone Bridge-Traffic Engineering or PBB-TE (also referred to as PBT) and transport MPLS address these requirements. These technologies enable connection-oriented Ethernet, providing carriers with a means of offering scalable, reliable and resilient Ethernet services. The PBB-TE and MPLS options on the FTB-8525/8535 Packet Blazer offer service providers a comprehensive field tool to efficiently qualify Ethernet services from end-to-end, validating metro and core tunneling technologies.

## EXacTCP

The transmission control protocol (TCP) provides the integrity and assurance that the data packets transmitted by one host are reliably received at the destination. Applications such as hypertext transfer protocol (HTTP), e-mail or file transfer protocol (FTP) rely on TCP as their delivery assurance mechanism.

Customers deploying such applications expect not only physical and link level SLAs from their service providers, but assurance that their TCP traffic requirements will be supported across the network. EXacTCP, the TCP throughput feature for the FTB-8525/8535, which is based on RFC 6349, provides accurate measurements of TCP metrics, such as throughput, roundtrip time (RTT) and optimal window size.

## Ethernet Advanced Troubleshooting

The FTB-8525/8535 provides a number of advanced features essential for in-depth troubleshooting in the event of network failures or impairments. The advanced filtering option allows the user to configure up to ten filters each with up to four operands, which will be applied to the received Ethernet traffic. Detailed statistics are available for each configured filter providing the user with the critical information required to pinpoint specific problems. Furthermore, the FTB-8525/8535 supports a traffic scan feature that allows quick identification and monitoring of VLAN and MPLS flows on the network. This can help clearly identify top bandwidth users.

The FTB-8525/8535 also supports full-line-rate data capturing and decoding. This key troubleshooting tool enables field technicians to easily identify complex network issues. The comprehensive capture feature includes the capacity to configure filters and triggers to quickly zero-in on network events.

### EXFO Connect

**EXFO | Connect**

**AUTOMATED ASSET MANAGEMENT. PUSH TEST DATA IN THE CLOUD. GET CONNECTED.**

EXFO Connect pushes and stores test equipment and test data content automatically in the cloud, allowing you to streamline test operation from build-out to maintenance.

## EXPERT TEST TOOLS ON THE FTB-200 PLATFORM

EXpert Test Tools is a series of platform-based software testing tools that enhance the value of the FTB-200 platform, providing additional testing capabilities without the need for additional modules or units.

### EXpert TEST TOOLS

#### EXpert VoIP TEST TOOLS

EXpert VoIP generates a voice-over-IP call directly from the test platform to validate performance during service turn-up and troubleshooting.

- › Supports a wide range of signaling protocols, including SIP, SCCP, H.248/Megaco and H.323
- › Supports MOS and R-factor quality metrics
- › Simplifies testing with configurable pass/fail thresholds and RTP metrics

#### EXpert IP TEST TOOLS

EXpert IP integrates six commonly used datacom test tools into one platform-based application to ensure that field technicians are prepared for a wide range of testing needs.

- › Rapidly performs debugging sequences with VLAN scan and LAN discovery
- › Validates end-to-end ping and traceroute
- › Verifies FTP performance and HTTP availability

#### EXpert IPTV TEST TOOLS

This powerful IPTV quality assessment solution enables set-top-box emulation and passive monitoring of IPTV streams, allowing quick and easy pass/fail verification of IPTV installations.

- › Real-time video preview
- › Analyzes up to 10 video streams
- › Comprehensive QoS and QoE metrics including MOS score

## FIBRE CHANNEL INTERFACES

FC-1X/2X/4X				
Wavelength (nm)	850	1310	1310	1550
Tx level (dBm)	-9 to -2.5	-8.4 to -3	0 to 5	1 to 5
Rx level sensitivity (dBm)	-15 at FC-4 -18 at FC-2 -20 at FC-1	-18 at FC-4 -21 at FC-2 -22 at FC-1	-18 at FC-4 -21 at FC-2 -22 at FC-1	-16.5 at FC-4 -20.5 at FC-2 -22 at FC-1
Maximum reach	500 m on 50/125 µm MMF <sup>c</sup> 300 m on 62.5/125 µm MMF <sup>c</sup>	4 km	30 km	40 km
Transmission bit rate (Gbit/s)	1.06/2.125/4.25	1.06/2.125/4.25	1.06/2.125/4.25	1.06/2.125/4.25
Reception bit rate (Gbit/s)	1.06/2.125/4.25	1.06/2.125/4.25	1.06/2.125/4.25	1.06/2.125/4.25
Tx operational wavelength range (nm)	830 to 860	1260 to 1350	1285 to 1345	1544.5 to 1557.5
Measurement accuracy (uncertainty)				
Frequency (ppm)	±4.6	±4.6	±4.6	±4.6
Optical power (dB)	±2	±2	±2	±2
Max Rx before damage (dBm)	3	3	3	3
Jitter compliance	ANSI FC-PI-2	ANSI FC-PI-2	ANSI FC-PI-2	ANSI FC-PI-2
FC classification	ANSI FC-PI-2	ANSI FC-PI-2	ANSI FC-PI-2	ANSI FC-PI-2
Laser type	VCSEL	Fabry-Perot	DFB	DFB
Eye safety	Class 1	Class 1	Class 1	Class 1
Connector	LC	LC	LC	LC
Transceiver type	SFP	SFP	SFP	SFP

FC-10X					
Wavelength (nm)	850	1310	1310	1550	1550
Tx level (dBm)	-5 to -1	0.5 max	-6 to -1	-1 to 2	0 to 4
Rx level sensitivity (dBm)	-11.1	-12.6	-14.4	-16	-23
Maximum reach	300 m on 50/125 µm MMF 30 m on 62.5/125 µm MMF	10 km	10 km	40 km	80 km
Transmission bit rate (Gbit/s)	10.5	10.5	10.5	10.5	10.5
Reception bit rate (Gbit/s)	10.5	10.5	10.5	10.5	10.5
Tx operational wavelength range (nm)	840 to 860	1260 to 1355	1290 to 1330	1530 to 1565	1530 to 1565
Measurement accuracy (uncertainty)					
Frequency (ppm)	±4.6	±4.6	±4.6	±4.6	±4.6
Optical power (dB)	±2	±2	±2	±2	±2
Max Rx before damage (dBm)	6	6	6	2	4
Jitter compliance	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3
FC classification	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3	ANSI FC-PI-3
Laser type	VCSEL	DFB	DFB	EML	EML
Eye safety	Class 1	Class 1	Class 1	Class 1	Class 1
Connector	LC	LC	LC	LC	LC
Transceiver type	XFP	XFP	XFP	XFP	XFP

## FIBRE CHANNEL FUNCTIONAL SPECIFICATIONS

TESTING (1X, 2X, 4X AND 10X)	
BERT	Unframed, framed FC-1, framed, FC-2
Patterns (BERT)	PRBS 2E31-1, 2E23-1, 2E20-1, 2E15-1, 2E11-1, 2E9-1 CSPAT, CRPAT, CJTPAT, and 10 user-defined 32 bits patterns
Error insertion	Bit error, symbol error, oversize error, CRC error, undersize error and block error
Error measurement	Bit error, symbol error, oversize error, CRC error, undersize error and block error
Alarm insertion	LOS, pattern loss
Alarm detection	LOS, pattern loss
Buffer-to-buffer credit testing	Buffer-to-buffer credit estimation based on latency
Latency	Round-trip latency measurement

ADDITIONAL TEST AND MEASUREMENT FUNCTIONS (1X, 2X, 4X AND 10X)	
Power measurement	Supports optical power measurement, displayed in dBm.
Frequency measurement	Supports clock frequency measurements (i.e., received frequency and deviation of the input signal clock from nominal frequency).
Frequency offset measurement	Range: ±120 ppm Resolution: 1 ppm Accuracy (uncertainty): ±4.6 ppm

### Notes

- Available on the FTB-500 platform only.
- Available on the FTB-200 platform only.
- Values in the table correspond to FC-1 rate. For FC-2, maximum reach is 300 m on 50/125 µm MMF and 150 m on 62.5/125 µm MMF. For FC-4, maximum reach is 150 m on 50/125 µm MMF and 70 m on 62.5/125 µm MMF.

## ETHERNET INTERFACES

## ELECTRICAL INTERFACES

	10Base-T	100Base-T	1000Base-T
Tx bit rate	10 Mbit/s	125 Mbit/s	1 Gbit/s
Tx accuracy (uncertainty) (ppm)	±100	±100	±100
Rx bit rate	10 Mbit/s	125 Mbit/s	1 Gbit/s
Rx measurement accuracy (uncertainty) (ppm)	±4.6	±4.6	±4.6
Duplex mode	Half and full duplex	Half and full duplex	Full duplex
Jitter compliance	IEEE 802.3	IEEE 802.3	IEEE 802.3
Connector	RJ-45	RJ-45	RJ-45
Maximum reach (m)	100	100	100

## 100 Mbit/s AND GIGE OPTICAL INTERFACES

	100Base-FX	100Base-LX	1000Base-SX	1000Base-LX	1000Base-ZX
Wavelength (nm)	1310	1310	850	1310	1550
Tx level (dBm)	-20 to -15	-15 to -8	-9 to -3	-9.5 to -3	0 to 5
Rx level sensitivity (dBm)	-31	-28	-20	-22	-22
Maximum reach	2 km	15 km	550 m	10 km	80 km
Transmission bit rate (Gbit/s)	0.125	0.125	1.25	1.25	1.25
Reception bit rate (Gbit/s)	0.125	0.125	1.25	1.25	1.25
Tx operational wavelength range (nm)	1280 to 1380	1261 to 1360	830 to 860	1270 to 1360	1540 to 1570
Measurement accuracy (uncertainty)					
Frequency (ppm)	±4.6	±4.6	±4.6	±4.6	±4.6
Optical power (dB)	±2	±2	±2	±2	±2
Maximum Rx before damage (dBm)	3	3	6	6	6
Jitter compliance	ANSI X3.166	IEEE 802.3	IEEE 802.3	IEEE 802.3	IEEE 802.3
Ethernet classification	ANSI X3.166	IEEE 802.3	IEEE 802.3	IEEE 802.3	IEEE 802.3
Laser type	LED	FP	VCSEL	FP	DFB
Eye safety	Class 1	Class 1	Class 1	Class 1	Class 1
Connector	LC	LC	LC	LC	LC
Transceiver type	SFP	SFP	SFP	SFP	SFP

## 10 GIGE OPTICAL INTERFACES

	10GBASE-SW	10GBASE-SR	10GBASE-LW	10GBASE-LR	10GBASE-EW	10GBASE-ER
Wavelength (nm)	850 Multimode	850 Multimode	1310 Singlemode	1310 Singlemode	1550 Singlemode	1550 Singlemode
Tx level (802.3ae-compliant) (dBm)	-7.3 to -1	-7.3 to -1	-8.2 to 0.5	-8.2 to 0.5	-4.7 to 4.0	-4.7 to 4.0
Rx operating range (dBm)	-9.9 to -1.0	-9.9 to -1.0	-14.4 to 0.5	-14.4 to 0.5	-15.8 to -1.0	-15.8 to -1.0
Transmission bit rate	9.95328 Gbit/s ± 4.6 ppm <sup>a</sup>	10.3125 Gbit/s ± 4.6 ppm <sup>a</sup>	9.95328 Gbit/s ± 4.6 ppm <sup>a</sup>	10.3125 Gbit/s ± 4.6 ppm <sup>a</sup>	9.95328 Gbit/s ± 4.6 ppm <sup>a</sup>	10.3125 Gbit/s ± 4.6 ppm <sup>a</sup>
Reception bit rate	9.95328 Gbit/s ± 135 ppm	10.3125 Gbit/s ± 135 ppm	9.95328 Gbit/s ± 135 ppm	10.3125 Gbit/s ± 135 ppm	9.95328 Gbit/s ± 135 ppm	10.3125 Gbit/s ± 135 ppm
Tx operational wavelength range (802.3ae-compliant) (nm)	840 to 860	840 to 860	1260 to 1355	1260 to 1355	1530 to 1565	1530 to 1565
Measurement accuracy (uncertainty)						
Frequency (ppm)	±4.6	±4.6	±4.6	±4.6	±4.6	±4.6
Optical power (dB)	±2	±2	±2	±2	±2	±2
Maximum Rx before damage (dBm)	0	0	1.5	1.5	4.0	4.0
Jitter compliance	IEEE 802.3ae	IEEE 802.3ae	IEEE 802.3ae	IEEE 802.3ae	IEEE 802.3ae	IEEE 802.3ae
Ethernet classification	IEEE 802.3ae	IEEE 802.3ae	IEEE 802.3ae	IEEE 802.3ae	IEEE 802.3ae	IEEE 802.3ae
Laser type	VCSEL	VCSEL	DFB	DFB	EML	EML
Eye safety	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1	Class 1 laser; complies with 21 CFR 1040.10 and IEC 60825-1
Connector	Duplex LC	Duplex LC	Duplex LC	Duplex LC	Duplex LC	Duplex LC
Transceiver type (compliant with XFP MSA)	XFP	XFP	XFP	XFP	XFP	XFP

**Note**

a. When clocking is in internal mode.



## ETHERNET FUNCTIONAL SPECIFICATIONS

TESTING (10 Mbit/s TO GIGe)	
EtherSAM (Y.1564)	Capability to perform the service configuration test, including the ramp and burst tests and service performance test as per ITU-T Y.1564. Tests can be performed to a loopback or dual test set mode for bidirectional results.
RFC 2544	Throughput, back-to-back, frame loss and latency measurements according to RFC 2544. Frame size: RFC-defined sizes, user-configurable.
BERT	Unframed, framed layer 1, framed layer 2 supported with or without VLAN Q-in-Q.
Patterns (BERT)	PRBS 2E9-1, PRBS 2E11-1, PRBS 2E15-1, PRBS 2E20-1, PRBS 2E23-1, PRBS 2E31-1, CRPAT, CSPAT, CJTPAT, Short CRTPAT, Long CRTPAT and up to 10 user patterns. Capability to invert patterns.
Error insertion (BERT)	FCS, bit and symbol.
Error measurement	Jabber/giant, runt, undersize, oversize, FCS, symbol, idle, carrier sense, alignment, collision, late collision, excessive collision, UDP and IP header checksum.
Error measurement (BERT)	Bit error, symbol error, idle error, bit mismatch 0, bit mismatch 1, performance monitoring (G.821 and G.826).
Alarm insertion (BERT)	LOS, pattern loss.
Alarm detection	LOS, link down, pattern loss, no traffic.
Service disruption time (SDT) measurement (BERT)	Defect or No Traffic mode. Disruption time statistics include shortest, longest, last, average, total and count.
VLAN stacking	Capability to generate one stream with up to three layers of VLAN (including IEEE 802.1ad Q-in-Q tagged VLAN).
Flow control statistics	Pause time, last pause time, max. pause time, min. pause time, paused frames, abort frames, frames Tx, frames Rx.
Advanced auto-negotiation	Capability to auto-negotiate the rate, duplex and flow control capabilities with another Ethernet port. Configurable auto-negotiation parameters. Display of link partner capabilities. Fault injection: offline, link failure, auto-negotiation error.
Multistream generation	Capability to transmit up to 10 streams. Configuration parameters are packet size, transmission mode (N-Frames, Burst, N-Burst, Ramp, N-Ramp and Continuous), MAC source/destination address, VLAN ID, VLAN priority, IP source/destination address, ToS field, DSCP field, TTL, UDP source/destination port and payload. (Available with Frame-Analyzer software option.) Selectable pre-defined stream profiles are also available for VoIP, video and data streams. VoIP codecs (G.711, G.723.1, G.729), video (MPEG-2 SDTV, MPEG-2 HDTV, MPEG-4 HDTV).
Traffic filtering	Capability to analyze the incoming traffic and provide statistics according to a set of up to 10 configurable filters. Filters can be configured for MAC source/destination address, VLAN ID, VLAN priority, IP source/destination address, ToS field, DSCP field, TCP source/destination port and UDP source/destination port. VLAN filtering can be applied to any of the stacked VLAN layers. (Available with Frame-Analyzer software option.)
Multistream analysis	Capability to analyze per stream statistics: packet jitter, latency, throughput, frame loss and out-of-sequence (available with Frame-Analyzer software option).
Ethernet statistics	Multicast, broadcast, unicast, N-unicast, pause frame, frame size distribution, bandwidth, utilization, frame rate, frame loss, out-of-sequence frames and in-sequence frames. (Available with Frame-Analyzer software option.)
Packet jitter statistics	Delay variation statistics (ms)—min., max., last, average and jitter measurement estimate (RFC 3393) (available with Frame Analyzer option).
PBB-TE <sup>a</sup>	Capability to generate and analyze streams with PBB-TE data traffic including configuration of B-MAC (source and destination), B-VLAN and I-tag (as per 802.1ah) and to filter received traffic by any of these fields.
MPLS <sup>a</sup>	Capability to generate and analyze streams with up to two layers of MPLS labels and to filter received traffic by MPLS label or COS.
IPv6 <sup>a</sup>	Capability to perform BERT, RFC 2544, traffic generation and analysis and Smart Loopback tests over IPv6; ping, traceroute, neighbor discovery and stateless auto-configuration.
Advanced filtering <sup>a</sup>	Capability to enhance the filters with up to four (4) fields each, which can be combined with AND/OR/NOT operations. A mask is also provided for each field value to allow for wildcards. Complete statistics are gathered for each defined filter.
Data capture <sup>a</sup>	Capability to perform 10/100/1000M full-line-rate data capture and decode. Capability to configure detailed capture filters and triggers as well as capture slicing parameters.
Traffic scan <sup>a</sup>	Capability to scan incoming live traffic and auto-discover all VLAN/VLAN Priority and MPLS ID/COS flows; capability to provide statistics for each flow including frame count and bandwidth.

ADDITIONAL TEST AND MEASUREMENT FUNCTIONS (10 Mbit/s TO GIGe)	
Power measurement	Supports optical power measurement, displayed in dBm.
Frequency measurement	Supports clock frequency measurements (i.e., received frequency and deviation of the input signal clock from nominal frequency).
Frequency offset measurement	Range: $\pm 120$ ppm Resolution: 1 ppm Accuracy (uncertainty): $\pm 4.6$ ppm
Dual test set	Performs end-to-end, bidirectional performance testing (as required by leading standards bodies)—remote FTB-8120NGE/8130NGE controlled via the LAN connection under test.
DHCP client	Capability to connect to a DHCP server to obtain its IP address and subnet mask for connecting on to the network.
Smart Loopback	Capability to return traffic to the local unit by swapping packet overhead up to layer 4 of the OSI stack.
IP tools	Capability to perform ping and traceroute functions.
TCP throughput measurements <sup>a</sup>	Capability to evaluate TCP throughput and provide performance results and statistics: window size with corresponding throughput, number of transmitted and re-transmitted segments, round-trip time.

### Note

a. Available as a software option.

## ETHERNET FUNCTIONAL SPECIFICATIONS (CONT'D)

TESTING (10 GIG)	
EtherSAM (Y.1564)	Capability to perform the service configuration test, including the ramp and burst tests and service performance test as per ITU-T Y.1564. Tests can be performed to a loopback or dual test set mode for bidirectional results.
RFC 2544	Throughput, back-to-back, frame loss and latency measurements according to RFC 2544. Frame size: RFC-defined sizes, user-configurable.
BERT	Unframed, framed layer 1, framed layer 2 supported with or without VLAN Q-in-Q.
Patterns (BERT)	PRBS 2E9-1, PRBS 2E11-1, PRBS 2E15-1, PRBS 2E20-1, PRBS 2E23-1, PRBS 2E31-1, and up to 10 user patterns.
Error insertion (BERT)	FCS, bit, 64B/66B Block
Error measurement	LAN/WAN: jabber/giant, runt, undersize, oversize, FCS, 64B/66B Block WAN: B1, B2, B3, REI-L, REI-P UDP, TCP and IP header checksum
Error measurement (BERT)	Bit error, bit mismatch 0, bit mismatch 1, performance monitoring (G.821 and G.826)
Alarm insertion	LOS, link down, local fault, remote fault, pattern loss (BERT) WAN: SEF, LOF, AIS-L, RDI-L, AIS-P, RDI-P, LCD-P, LOP-P, ERDI-PSD, ERDI-PCD, ERDI-PPD, UNEQ-P
Alarm detection	LOS, link down, local fault, remote fault, frequency offset, pattern loss (BERT) WAN: SEF, LOF, AIS-L, RDI-L, AIS-P, RDI-P, LCD-P, LOP-P, ERDI-PSD, ERDI-PCD, ERDI-PPD, PLM-P, UNEQ-P, link (WIS)
Service disruption time (SDT) measurement (BERT)	Defect or No Traffic mode. Disruption time statistics include shortest, longest, last, average, total and count.
VLAN stacking	Capability to generate one stream with up to three layers of VLAN (including IEEE802.1ad Q-in-Q tagged VLAN).
Flow control statistics	Pause time, last pause time, max. pause time, min. pause time, paused frames, abort frames, frames Tx, frames Rx.
Multistream generation	Capability to transmit up to 10 streams. Configuration parameters are packet size, transmission mode (N-Frames, Burst, N-Burst, Ramp, N-Ramp and Continuous), MAC source/destination address, VLAN ID, VLAN priority, IP source/destination address, ToS field, DSCP field, TTL, UDP source/destination port and payload. (Available with Frame-Analyzer software option.) Selectable pre-defined stream profiles are also available for VoIP, video and data streams. VoIP codecs (G.711, G.723.1, G.729), video (MPEG-2 SDTV, MPEG-2 HDTV, MPEG-4 HDTV).
Traffic filtering	Capability to analyze the incoming traffic and provide statistics according to a set of up to 10 configurable filters. Filters can be configured for MAC source/destination address, VLAN ID, VLAN priority, IP source/destination address, ToS field, DSCP field, TCP source/destination port and UDP source/destination port. VLAN filtering can be applied to any of the stacked VLAN layers. (Available with Frame-Analyzer software option.)
Multistream analysis	Capability to analyze per stream statistics: packet jitter, latency, throughput, frame loss and out-of-sequence (available with Frame-Analyzer software option)
Ethernet statistics	Multicast, broadcast, unicast, N-unicast, pause frame, frame size distribution, bandwidth, utilization, frame rate, frame loss, out-of-sequence frames and in-sequence frames. (Available with Frame-Analyzer software option.)
Packet jitter statistics	Delay variation statistics (ms)—min., max., last, average and jitter measurement estimate (RFC 3393) (available with Frame Analyzer option).
PBB-TE <sup>a</sup>	Capability to generate and analyze streams with PBB-TE data traffic including configuration of B-MAC (source and destination), B-VLAN and I-tag (as per 802.1ah) and to filter received traffic by any of these fields.
MPLS <sup>a</sup>	Capability to generate and analyze streams with up to two layers of MPLS labels and to filter received traffic by MPLS label or COS.
IPv6 <sup>a</sup>	Capability to perform BERT, RFC 2544, traffic generation and analysis and Smart Loopback tests over IPv6; ping, traceroute, neighbor discovery and stateless auto-configuration.
Advanced filtering <sup>a</sup>	Capability to enhance the filters with up to four (4) fields each, which can be combined with AND/OR/NOT operations. A mask is also provided for each field value to allow for wildcards. Complete statistics are gathered for each defined filter.
Data capture <sup>a</sup>	Capability to perform 10/100/1000M full-line-rate data capture and decode. Capability to configure detailed capture filters and triggers as well as capture slicing parameters.
One-way delay	Capability to measure one-way frame delay as part of EtherSAM (Y.1564) and RFC 2544

ADDITIONAL TEST AND MEASUREMENT FUNCTIONS (10 GIG)	
Power measurement	Supports optical power measurement, displayed in dBm.
Frequency generation and measurement	Supports clock frequency generation and measurements (i.e., received frequency and deviation of the input signal clock from nominal frequency). Frequency offset generation: Range: $\pm 50$ ppm Resolution: $\pm 1$ ppm Accuracy (uncertainty): $\pm 4.6$ ppm  Frequency offset measurement: Range: $\pm 135$ ppm Resolution: $\pm 1$ ppm Accuracy (uncertainty): $\pm 4.6$ ppm
Signal label control and monitoring	Ability to configure and monitor J0 Trace, J1 Trace and payload signal label C2 (WAN).
Dual test set	Performs end-to-end, bidirectional performance testing (as required by leading standards bodies)—remote FTB-8120NGE/8130NGE controlled via the LAN connection under test.
DHCP client	Capability to connect to a DHCP server to obtain its IP address and subnet mask to connect to the network.
Smart Loopback	Capability to return traffic to the local unit by swapping packet overhead up to layer 4 of the OSI stack.
IP tools	Capability to perform ping and traceroute functions.

### Note

a. Available as a software option.

## ETHERNET FUNCTIONAL SPECIFICATIONS (CONT'D)

### ADDITIONAL FEATURES

Expert mode	Ability to set thresholds in RFC 2544 and BERT mode to provide a pass/fail status.
Scripting	The built-in Visual Basic .NET scripting engine and embedded macrorecorder provide a simple means of automating test cases and routines. Embedded scripting routines provide a powerful means of creating advanced test scripts. <sup>a</sup>
Event logger	Supports logging of test results, and the ability to print, export (to a file), or export the information contained in the logging tool.
Power up and restore <sup>a</sup>	In the event of a power failure to the unit, the active test configuration and results are saved and restored upon bootstrap.
Save and load configuration	Ability to store and load test configurations to/from non-volatile memory.
Configurable test views	Allows users to customize their test views; i.e., to dynamically insert or remove test tabs/windows, in addition to creating new test windows, so as to accurately match their testing needs. <sup>a</sup>
Configurable test timer	Allows a user to set a specific start, stop and duration for tests.
Test favorites	Capability to select and load from predefined or user-modified test conditions.
Report generation	Ability to generate test reports in the following user-selectable formats: .pdf, .html, .txt and .csv.
Graph	Allows to graphically display the test statistics of the performance (RFC 2544).
Screen capturing <sup>b</sup>	Capability to gather a snap-shot of the screen for future use.
Logger printing <sup>b</sup>	Capability to send logger messages to a supported local printer.
Remote control	Remote control through Visual Guardian Lite software or VNC.

#### Notes

a. Available on the FTB-500 platform only.

b. Available on the FTB-200 platform only.

### MODEL SPECIFICATIONS

	FTB-8525	FTB-8535
<b>Fibre Channel Rate Options</b>		
FC10x (Fibre Channel 10x rate)	Not available	Available
FC4x (Fibre Channel 4x rate)	Available	Available
FC1x-FC2x (Fibre Channel 1x and 2x rates)	Available	Available
<b>Ethernet Rate Options</b>		
10GigE (Ethernet 10 GigE LAN and WAN)	Not available	Available
GigE (Ethernet 10/100/1000 Base-T and optical GigE)	Available	Available
100optical (100 Mbit/s optical Ethernet)	Available	Available

### GENERAL SPECIFICATIONS

	FTB-8525	FTB-8535
Weight	0.9 kg (2.0 lb)	0.9 kg (2.0 lb)
Size	96 mm x 51 mm x 280 mm (3 3/4 in x 2 in x 11 in)	96 mm x 51 mm x 288 mm (3 3/4 in x 2 in x 11 3/8 in)
Temperature		
Operating	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)
Storage	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)

## ORDERING INFORMATION

## FTB-85XX-XX-XX-XX-XX-XX

**Models**

FTB-8525 = Fibre Channel and Ethernet test module  
 FTB-8535 = Fibre Channel and Ethernet test module

**Ethernet Rate Options**

00 = without rate option  
 LAN/WAN 10GigE = Ethernet 10GigE LAN and WAN <sup>a</sup>  
 10M/100M/1000M = Ethernet 10/100/1000 Base-T  
 and optical GigE  
 100M-0-AP = 100 Mbit/s optical Ethernet <sup>b</sup>

**Fibre Channel Rate Options**

FC1x, 2x = Fibre Channel 1x and 2x testing  
 FC4x = Fibre Channel 4x testing  
 FC10x = Fibre Channel 10x testing <sup>a</sup>  
 FC-BUNDLE = Fibre Channel 1x, 2x, 4x and 10x testing <sup>a</sup>

**Transceivers SFP Test Port**

00 = SFP test port  
 FTB-85910 = 100Base-FX (1310 nm) MM, LC connectors;  
 optical SFP transceiver module <sup>c</sup>  
 FTB-85911 = 100Base-LX (1310 nm) SM, LC connectors;  
 optical SFP transceiver module <sup>c</sup>  
 FTB-85912 = SFP modules GigE/FC/2FC/4FC at 850 nm, MMF, < 500 m  
 FTB-85913 = SFP modules GigE/FC/2FC/4FC at 1310 nm, MMF, < 4 km  
 FTB-85914 = SFP modules GigE/FC/2FC/4FC at 1310 nm, MMF, < 30 km  
 FTB-85915 = SFP modules GigE/FC/2FC/4FC at 1550 nm, MMF, < 40 km

**Options**

Frame-Analyzer = Multiple stream generation and analysis  
 PBB-TE = PBB-TE testing  
 MPLS = MPLS testing  
 Adv\_filtering = Advanced filtering capabilities  
 IPv6 = IPv6 testing capabilities  
 TCP-THPUT = TCP throughput measurement <sup>b</sup>  
 EtherSAM = EtherSAM (ITU-T Y.1564) testing capabilities  
 Data\_Capture = Data capture and decode capabilities  
 TRAFFIC-SCAN = VLAN/MPLS traffic scan

**Transceivers XFP Test Port** <sup>a</sup>

FTB-85900 = 10GBase-SR/-SW (850 nm, LAN/WAN PHY)  
 LC connectors; optical XFP transceiver module  
 FTB-85901 = 10GBase-LR/-LW (1310 nm, LAN/WAN PHY)  
 LC connectors; optical XFP transceiver module  
 FTB-85902 = 10GBase-ER/-EW (1550 nm, LAN/WAN PHY)  
 LC connectors; optical XFP transceiver module

Example: FTB-8535-10M/100M/1000M-FC10x-85912-85901

**Notes**

- Available with FTB-730-000-04B and FTB-730-23B-04B only.
- Available with iOLM base software only. This feature is part of the Oi base software.
- Available with OTDR and Oi base softwares only.

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | [www.EXFO.com](http://www.EXFO.com)

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to [www.EXFO.com/contact](http://www.EXFO.com/contact).

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit [www.EXFO.com/recycle](http://www.EXFO.com/recycle). **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to the EXFO website at [www.EXFO.com/specs](http://www.EXFO.com/specs).

In case of discrepancy, the Web version takes precedence over any printed literature.