

IQS-2400

WDM LASER SOURCE



40G

Please note that this model has been discontinued. For more information, visit EXFO.com

Designed for multiwavelength network simulations, multiple and simultaneous inputs for EDFA characterization, as well as insertion loss measurement of WDM passive components.

SPEC SHEET

KEY FEATURES

C- and L-band use

13 dBm output power

± 0.01 nm accuracy

Outstanding wavelength stability

Ideal for EDFA testing

APPLICATIONS

Generation of DWDM combs (ITU grid)

High-stability calibration of power meters and attenuators

COMPLEMENTARY PRODUCTS



Optical Switch
IQS-9100



High-Speed Power Meter
IQS-1600



Variable Attenuator
IQS-3150

EXFO

HIGH-ACCURACY WDM LASER SOURCE

The IQS-2400 WDM Laser Source offers high accuracy and stability for testing the power and spectral sensitivity of active components, passive components and WDM building blocks.

Unequaled long-term wavelength stability


The IQS-2400 emulates ITU-T channels in dense WDM applications such as multiwavelength network simulation, simultaneous multiple inputs for EDFA characterization and insertion loss measurement of DWDM passive components. This source is ideal for the production environment offering unmatched, long-term wavelength stability. The ± 0.01 nm absolute accuracy enables the IQS-2400 WDM Laser Source to replace a wavelength measurement instrument when testing components or systems. The IQS-2400 features wavelength-tuning capabilities around each of the ITU-T grid wavelengths, dithering up to 300 kHz with a triangular or square waveform, and an output power reaching 13 dBm with a 10 dB attenuation range. DFB laser diode manufacturers have the option of providing their own DFBs.




IQS-2400 WDM Laser Source

Multifunctional flexibility to match your needs

The IQS-2400 WDM Laser Source can operate in four different modes: Normal, High-Wavelength Stability, Dithering and On/Off. Normal mode provides access to total wavelength and power tuning ranges, maintaining full control of the output power (automatic power control). From a set point in wavelength and power levels, High-Wavelength Stability mode provides finer wavelength and power tuning resolutions through laser temperature steps of 0.01°C and laser current steps of 0.01 mA. This mode operates the laser at a constant current (automatic current control). Since the central wavelength may drift slightly (due to aging) in Normal mode, High-Wavelength Stability mode allows for continuous access to long-term, high-accuracy wavelength set points. The last two modes, On/Off and Dithering, provide modulation capabilities from 10 Hz to 300 kHz. On/Off mode ensures maximum optical extinction when activated, while Dithering mode adds a small waveform (triangular or square) to the CW signal, thus reducing the signal coherence length. In On/Off mode, several sources can be synchronized from an external TTL signal generator or from any module's synchronization output. Therefore, each source can operate at a different frequency and amplitude or precisely in phase.

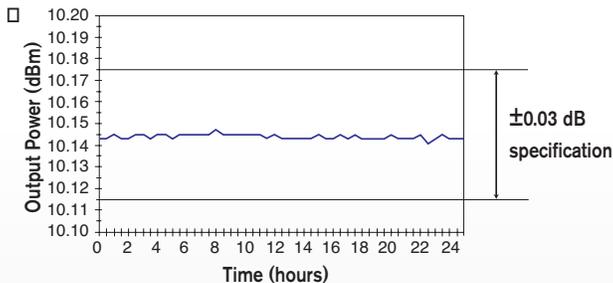

The source's excellent power stability output is ideal for long-term monitoring.

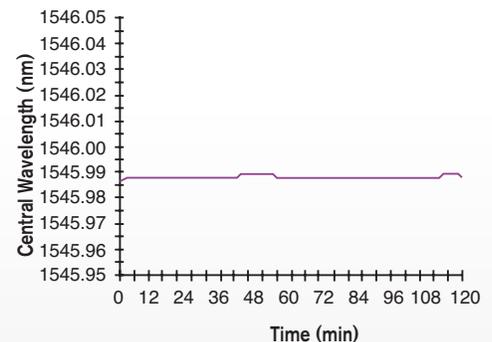


The temperature stabilization circuit ensures low central wavelength drift.

Precise calibration for outstanding performance

The power and wavelength of each DFB laser is accurately calibrated to ensure the best possible performance and confidence in your test results. The IQS-2400's calibration setup, using its NIST-traceable wavelength meter and four-channel power meter, allows fully referenced and automated calibration of the DFB's internal temperature and laser current. A precise central wavelength at any power level can be obtained. The ± 0.01 nm absolute accuracy is one of the highest levels of accuracy available today for a laser source instrument.

Versatile and reliable EDFA and WDM testing

Combine more than one modular IQS-2400 WDM Laser Source with an IQS-3150-B Variable Attenuator or 3150-BI Variable Attenuator (with integrated power meter), an IQS-1700X Power Meter and an IQS-5240S/BP Optical Spectrum Analyzer in an IQS-600 Integrated Qualification System. This setup enables precise, stable tones at every attenuation step throughout the complete WDM spectrum. Automatic tone balancing avoids the time-consuming and tedious manual adjustments that were once necessary to obtain a uniform input comb.

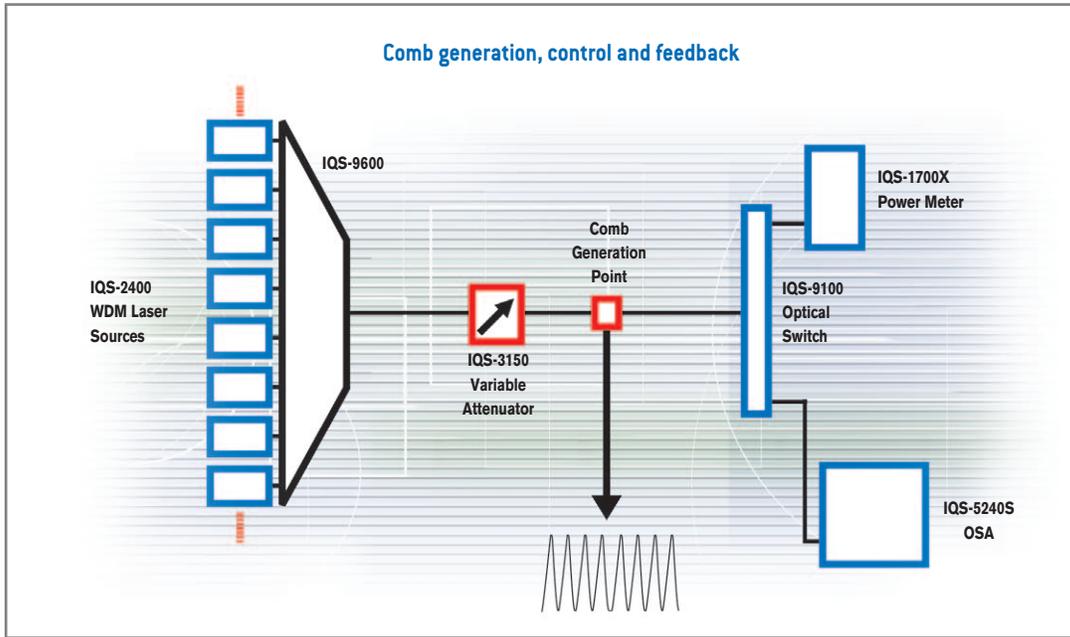


Typical setup for an IQS-based optical fiber amplifier test system using the IQS-2400 WDM Laser Source.

MAIN SCREEN: IQS-2400 SOFTWARE APPLICATION

A ± 1 nm tuning range for complete optical loss/gain characterization around each ITU-T grid wavelength

Quick access to pre-selected set points

A 10 dB output power attenuation range

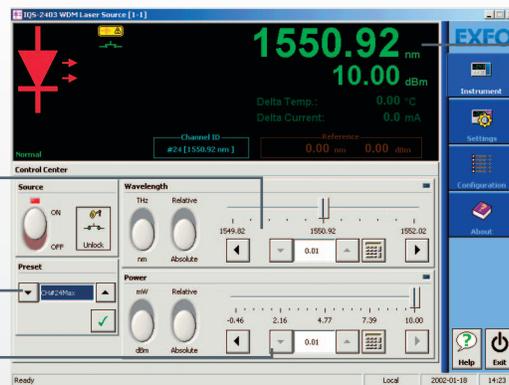

Indicator: user-defined set point for power and wavelength

IQS-2402 SPECIFICATIONS

Model	P4	
Wavelength band (nm)	1308 ± 5	
Wavelength tuning range (nm)	±0.5 (typical)	
Wavelength tuning resolution ^b (nm)	0.01	
Wavelength accuracy ^{c, d} (nm)	±0.01	
Wavelength stability ^{d, e} (nm)	±0.002	
Output power ^f (dBm)	10	
Output power attenuation range (dB)	>6	
Spectral linewidth (MHz) (typical)	<20	
Sidemode suppression ^g (dB)	30 (40 typical)	
Output power uncertainty ^c (dB)	±0.3	
Power stability ^{c, d} (dB)	15 min 8h	±0.005 ($\Delta=0.01$) ±0.03 ($\Delta=0.06$)
Modulation frequency (internal or external sync.) (kHz)	0.010 to 300	
Dithered modulation amplitude range ^h (mA)	1 to 5	
Dithered modulation electrical waveform	Square/triangular	

IQS-2403 SPECIFICATIONS

Model	P4/P5	P6/P7
Wavelength band	C band 1528 nm to 1565 nm	C band 1528 nm to 1565 nm
Wavelength tuning range ^a (nm)	±1	±1
Wavelength tuning resolution ^b (nm)	0.01	0.01
Wavelength accuracy ^{c, d} (nm)	±0.01	±0.02
Wavelength stability ^{d, e} (nm)	±0.002	±0.002
Output power ^f (dBm)	10	13
Spectral linewidth (MHz) (typical)	<20	<20
Output power attenuation range (dB)	10	10
Sidemode suppression ^g (dB)	30 (40 typical)	30 (40 typical)
Output power uncertainty ^c (dB)	±0.3	±0.3
Power stability ^{c, d} (dB)	15 min 8h	±0.005 ($\Delta=0.01$) ±0.03 ($\Delta=0.06$)
Modulation frequency (internal or external sync.) (kHz)	0.010 to 300	0.010 to 300
Dithered modulation amplitude range ^h (mA)	1 to 5	1 to 5
Dithered modulation electrical waveform	Square/triangular	Square/triangular

IQS-2404 SPECIFICATIONS		
Model	P4/P5	P6/P7
Wavelength band	L band 1566 nm to 1606 nm	L band 1566 nm to 1606 nm
Wavelength tuning range ^a (nm)	±1	±1
Wavelength tuning resolution ^b (nm)	0.01	0.01
Wavelength accuracy ^{c,d} (nm)	±0.01	±0.02
Wavelength stability ^{d,e} (nm)	±0.002	±0.002
Output power ^f (dBm)	10	13
Output power attenuation range (dB)	10	10
Spectral linewidth (MHz) (typical)	<20	<20
Sidemode suppression ^g (dB)	30 (40 typical)	30 (40 typical)
Output power uncertainty ^c (dB)	±0.3	±0.3
Power stability ^{c,d} (dB) 15 min 8h	±0.005 ($\Delta=0.01$) ±0.03 ($\Delta=0.06$)	±0.005 ($\Delta=0.01$) ±0.03 ($\Delta=0.06$)
Modulation frequency (internal or external sync.) (kHz)	0.010 to 300	0.010 to 300
Dithered modulation amplitude range ^h (mA)	1 to 5	1 to 5
Dithered modulation electrical waveform	Square/triangular	Square/triangular

Notes

- a. Guaranteed if the ambient temperature stays between 15 °C to 30 °C.
b. In high-wavelength stability mode, better resolution is possible, but on a limited range.
c. Specified at 23 °C ± 1 °C with 50 % relative humidity.
d. After a 1-hour warmup period.
e. For 8 hours at 23 °C ± 1 °C with 50 % relative humidity.
f. Output power is specified at connector output.
g. Guaranteed at maximum power level.
h. Dithered modulation is only available internally at a typical duty cycle of 50 % duty cycle.

GENERAL SPECIFICATIONS		
Size (H x W x D)	125 mm x 36 mm x 282 mm	4 15/16 in x 1 7/16 in x 11 1/8 in
Weight	0.580 kg	1.25 lb
Temperature		
Operating	10 °C to 40 °C	50 °F to 104 °F
Storage	-40 °C to 70 °C	-40 °F to 158 °F
Relative humidity	0 to 95 % non-condensing	
Instrument drivers	LabVIEW™ drivers, SCPI commands and COM/DCOM libraries	
Remote control	With IQS-500: GPIB (IEEE-488.1, IEEE-488.2) Ethernet and RS-232	
Standard accessories	User guide, test report and Certificate of Compliance	

ORDERING INFORMATION

IQS-24XXBLD-XX-XX-XX

Wavelength band

- 02 = 1308 nm
- 03 = 1528-1565 nm (C band)
- 04 = 1566-1606 nm (L band)

Options code

- P4 = +10 dBm
- P5 = +10 dBm with PMF output^a
- P6 = +13 dBm
- P7 = +13 dBm with PMF output^a

Notes

- a. When PM fiber is selected, the slow axis is aligned with the connector key.

Connector code

- EA-EUI-96 = E-2000/APC
- EA-EUI-89 = APC/FC
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000

Specified wavelength (nm)

96 = 1528.77	29 = 1554.94	62 = 1582.02
97 = 1529.55	30 = 1555.75	63 = 1582.85
98 = 1530.33	31 = 1556.55	64 = 1583.69
99 = 1531.12	32 = 1557.36	65 = 1584.53
00 = 1531.90	33 = 1558.17	66 = 1585.36
01 = 1532.68	34 = 1558.98	67 = 1586.20
02 = 1533.47	35 = 1559.79	68 = 1587.04
03 = 1534.25	36 = 1560.61	69 = 1587.88
04 = 1535.04	37 = 1561.42	70 = 1588.73
05 = 1535.82	38 = 1562.23	71 = 1589.57
06 = 1536.61	39 = 1563.05	72 = 1590.41
07 = 1537.40	40 = 1563.86	73 = 1591.26
08 = 1538.19	41 = 1564.68	74 = 1592.10
09 = 1538.98	42 = 1565.50	75 = 1592.95
10 = 1539.77	43 = 1566.31	76 = 1593.79
11 = 1540.56	44 = 1567.13	77 = 1594.64
12 = 1541.35	45 = 1567.95	78 = 1595.49
13 = 1542.14	46 = 1568.77	79 = 1596.34
14 = 1542.94	47 = 1569.59	80 = 1597.19
15 = 1543.73	48 = 1570.43	81 = 1598.04
16 = 1544.53	49 = 1571.24	82 = 1598.89
17 = 1545.32	50 = 1572.06	83 = 1599.75
18 = 1546.12	51 = 1572.89	84 = 1600.60
19 = 1546.92	52 = 1573.71	85 = 1601.46
20 = 1547.72	53 = 1574.54	86 = 1602.31
21 = 1548.51	54 = 1575.37	87 = 1603.17
22 = 1549.32	55 = 1576.20	88 = 1604.03
23 = 1550.12	56 = 1577.03	89 = 1604.89
24 = 1550.92	57 = 1577.86	90 = 1605.74
25 = 1551.72	58 = 1578.69	CU = 1308
26 = 1552.52	59 = 1579.52	
27 = 1553.33	60 = 1580.35	
28 = 1554.13	61 = 1581.18	

SAFETY



Complies with 21 CFR 1040.10 and 11 except for deviations pursuant to Laser Notice No.50 dated June 24, 2007.

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | www.EXFO.com

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at www.EXFO.com/specs.

In case of discrepancy, the Web version takes precedence over any printed literature.