


1X12 OPTICAL SWITCH MODULE

FTB-9100

NETWORK TESTING

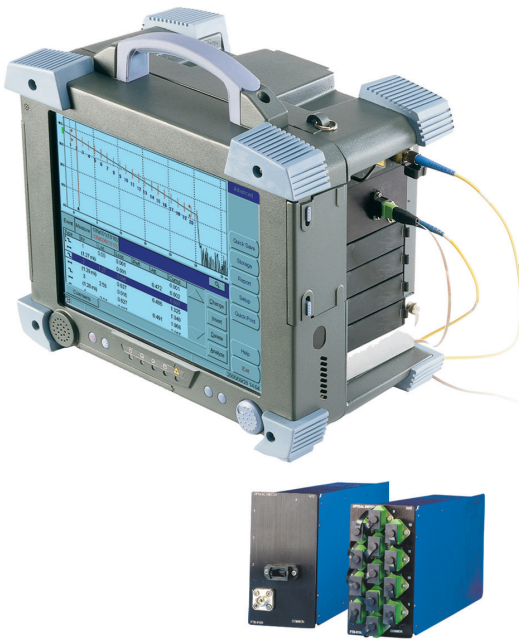

Multiply Speed and Power

Multiply your measurement power by achieving highly accurate, repeatable fiber-to-fiber switching with the FTB-9100 Optical Switch. Combine the FTB-9100 Optical Switch, an OTDR module and EXFO's advanced FTB-400 Universal Test System, to automatically perform single- or dual-wavelength OTDR acquisitions on up to 12 fibers.

Stop Waiting, Start Testing

The optical switch module performs reliable one-stop batch fiber testing or ribbon-fiber testing by switching between one common port and 12 input/output ports. Choose from three output connector types: MTP (ribbon), SC or E-2000. With only one connection to handle, the MTP connector and patchcord configuration cuts setup time and speeds up testing.

Get Ahead on High-Volume Acquisitions

Efficient software is essential for realizing productivity goals. ToolBox OTDR software automatically delivers accurate, high-volume testing. Simply press the Start button and let the FTB-9100 Optical Switch direct the OTDR signal from one fiber to another. ToolBox OTDR software automatically acquires and stores test data, then generates an integrated result table based on Pass/Fail thresholds.

Platform Compatibility

FTB-400 Universal Test System

- MTP, SC or E-2000 output connectors
- Continuous OTDR testing on up to 12 fibers
- Accelerated ribbon-fiber testing

SPECIFICATIONS ^a

Model	FTB-9100-01-12-B-XX	FTB-9100-01-12-B-92-XX	FTB-9100-01-12-B-92-XX
Number of channels	Singlemode	Singlemode	Multimode
Connector type	1x12 SC/PC (54), E-2000/PC (95) SC/APC (88), E-2000/APC (96)	1x12 MTP/APC (female connector) ^b	1x12 SC/PC (54)
Insertion loss ^c (dB)	0.7	0.9	0.5
Backreflection ^d (dB)	-40 (PC) -55 (APC)	-55	-24
Repeatability ^e (dB)	± 0.03	± 0.03	± 0.03
Operating wavelengths (nm)	1290 to 1650	1290 to 1650	780 to 1350
Polarization dependent loss (dB)	0.05 ^f	0.05 ^f	-
Crosstalk (dB)	-80	-80	-80
Switch life	10 million cycles minimum (excluding connector cycles)		
Maximum optical input power	24 dBm	24 dBm	24 dBm

GENERAL SPECIFICATIONS ^a

Temperature		
operating	10 °C to 40 °C	(50 °F to 104 °F)
storage	-20 °C to 60 °C	(-4 °F to 140 °F)
Relative humidity	80 % max. non-condensing	
Size (H x W x D)	96 mm x 51 mm x 260 mm	(3 3/4 in x 2 in x 10 1/4 in)
Weight	1.0 kg	(2.2 lb)

NOTES

- All specifications are for a temperature of 23 °C (73 °F) with an SC/PC connector unless otherwise specified.
- MTP connectors are sensitive to dirt. Protection and cleanup before and after each use is recommended.
- Typical insertion loss per module, excluding connectors, measured at singlemode wavelengths of 1310 nm and 1550 nm.
- Typical backreflection measured at singlemode wavelengths of 1310 nm and 1550 nm, excluding connectors.
- Typical repeatability values for 100 cycles per switch module at a constant temperature for 1 hour with a stabilized source/power meter at singlemode wavelengths of 1310 nm and 1550 nm.
- Typical.
- Configuration 54-SC/PC is offered for singlemode or multimode fiber types.
- Configuration 88-SC/APC is offered for singlemode fiber types only.
- Configuration E-2000 is offered for singlemode fiber types only.

ORDERING INFORMATION

FTB-9100-01-12-X-XX

Fiber ■

- B = 9/125 µm singlemode
- C = 50/125 µm multimode
- D = 62.5/125 µm multimode

Input/Output connector ■

- 54 = SC/PC^g
- 88 = SC/APC^h
- 95 = E-2000/PCⁱ
- 96 = E-2000/APCⁱ

Example:

FTB-9100-01-12-C-54

FTB-9100-01-12-X-XX-XX

Fiber ■

- B = 9/125 µm singlemode

Output connector ■

- 92 = MTP/APC

Example:

FTB-9100-01-12-B-92-EI-EUI-89

Input connector ■

- EI-EUI-28 = UPC/DIN 47256
- EI-EUI-76 = UPC/HMS-10/AG
- EI-EUI-89 = UPC/FC narrow key
- EI-EUI-90 = UPC/ST
- EI-EUI-91 = UPC/SC
- EI-EUI-95 = UPC/E-2000
- EA-EUI-28 = APC/DIN 47256
- EA-EUI-89 = APC/FC narrow key
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000

Find out more about EXFO's extensive line of high-performance portable instruments by visiting our website at www.EXFO.com.

EXFO Corporate Headquarters > 400 Godin Avenue, Quebec City (Quebec) G1M 2K2 CANADA | Tel.: 1 418 683-0211 | Fax: 1 418 683-2170 | info@EXFO.com

Toll-free: 1 800 663-3936 (USA and Canada) | www.EXFO.com

EXFO America	3701 Plano Parkway, Suite 160 Plano, TX 75075 USA	Tel.: 1 800 663-3936	Fax: 1 972 836-0164
EXFO Europe	Omega Enterprise Park, Electron Way Chandlers Ford, Hampshire S053 4SE ENGLAND	Tel.: +44 2380 246810	Fax: +44 2380 246801
EXFO Asia	151 Chin Swee Road, #03-29 Manhattan House SINGAPORE 169876	Tel.: +65 6333 8241	Fax: +65 6333 8242
EXFO China	No.88 Fuhua, First Road Central Tower, Room 801, Futian District Beijing New Century Hotel Office Tower, Room 1754-1755 No. 6 Southern Capital Gym Road	Shenzhen 518048, CHINA Beijing 100044 P. R. CHINA	Tel.: +86 (755) 8203 2300 Tel.: +86 (10) 6849 2738
		Fax: +86 (755) 8203 2306	Fax: +86 (10) 6849 2662

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. All of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at <http://www.EXFO.com/specs>

In case of discrepancy, the Web version takes precedence over any printed literature.